

Primary Injection and Test Equipments



Features and application

- Large DC current output : 0-4000A
- High precision : 0.1%
- Long output time : max. 60s at 4000A
- Easy panel control with LCD display
- Manual and Ramp control
- Optional external PC control via USB port
- Can be used to test DC CT for DC converting station

Model T4000



Rated power	20kVA	1 Binary output	V _{max} 250V AC / I _{max} 8A / P _{max} 2000VA V _{max} 250V DC / I _{max} 8A / P _{max} 150W
Rated current output	4000A DC	2 Binary inputs	Dry or wet (30-250Vdc)
Rated output voltage	5V	Control	Local control or via external PC
Typical error	≤0.1%	Protection	Phase missing of main supply, overload, overheat
Typical distortion	<0.5%	Main supply	3×380V AC /40 ~ 60Hz/30KVA/3P4W
		Weight	100kg

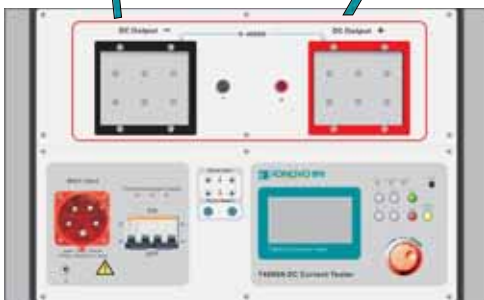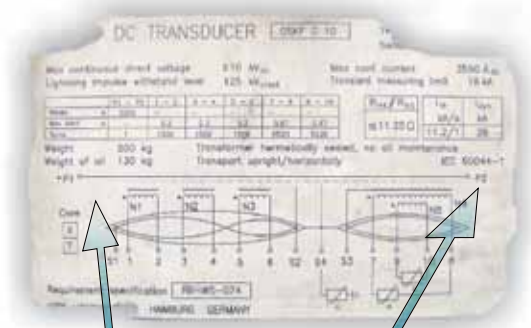

Aluminum Stranded

Tube busbar or aluminum stranded connector

